

## How to configure the BR-6104KP to share printers

This FAQ applies to the following models and Operation System:


- ▲ BR-6104KP
- ▲ Windows 2000 / XP

### Introduction:

This guide will help you to configure your PC to share printers with the BR-6104KP. As shown in the **Figure-1**. We will help to configure PC-A so that it can print with the printer HP LaserJet 1100 (this printer is connected to the USB1 port of the BR-6104KP).




**Note:** Not all printers are supported with the BR-6104KP. Basically, please use the printer using the printing language, "PCL". Generally speaking, the **all-in-one** printers will not be supported. (For all-in-one/multifunctional printers, please choose our other models such as the PS-1206MF or PS-1216). Edimax aims to verify supported printers as much as possible, and publish this information in the compatibility list which is visible on the website. We guarantee that the printers in the list will work with the BR-6104KP). However, printers which are not in the list may still work with the BR-6104KP.

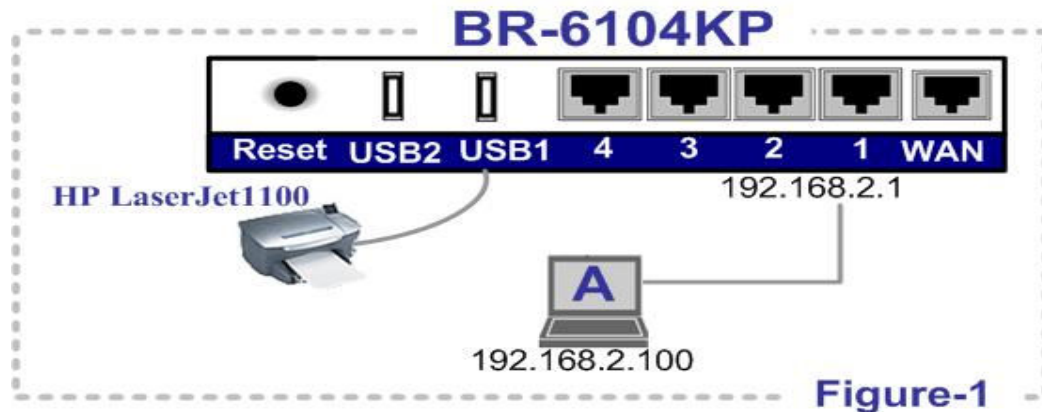


### Step by Step:

**Step 1. Enable the "Printer Server".**

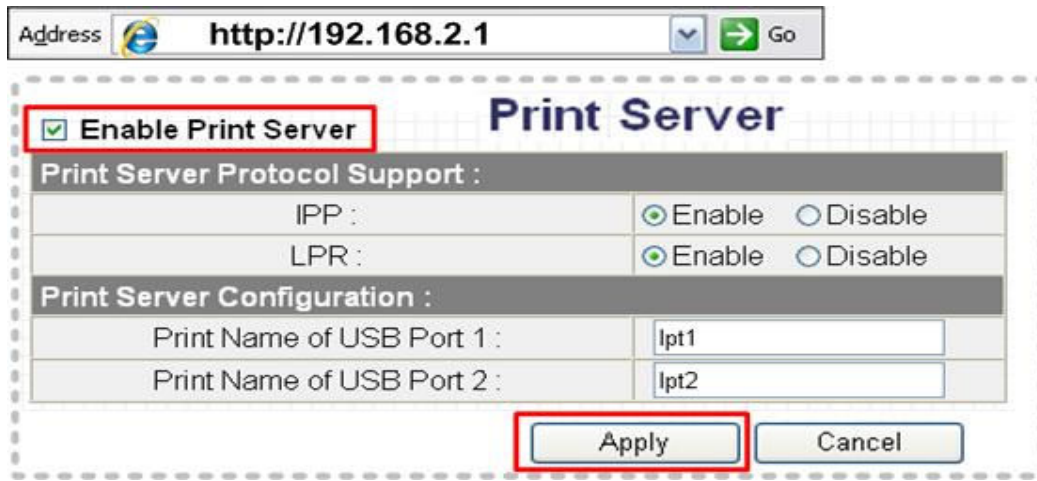


**Step 2. Click “ Printers and Faxes”.**

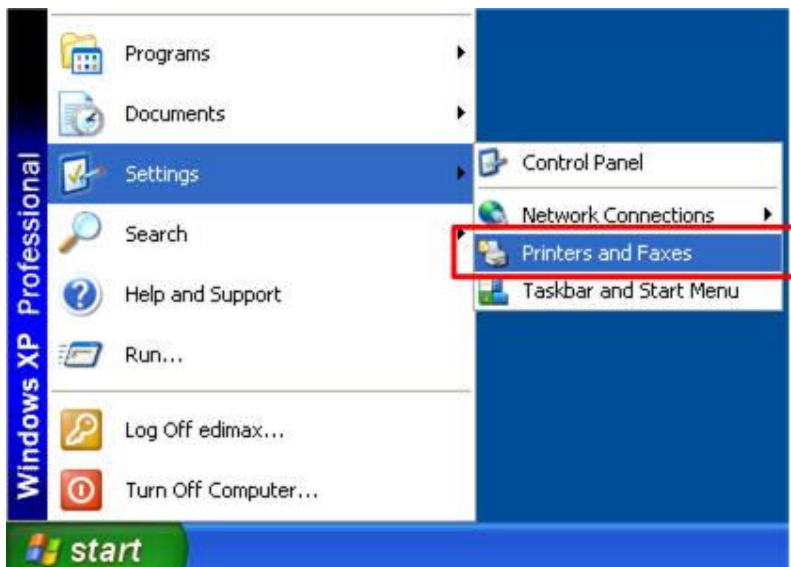


**Step 3. Right-click the “driver icon’ (in this case, the printer is the HP LaserJet 1100. Please use your own printer in your case) and select “Properties”.**



**Step 4. Click on the tab “Ports”, and uncheck “Enable bidirectional support”.**

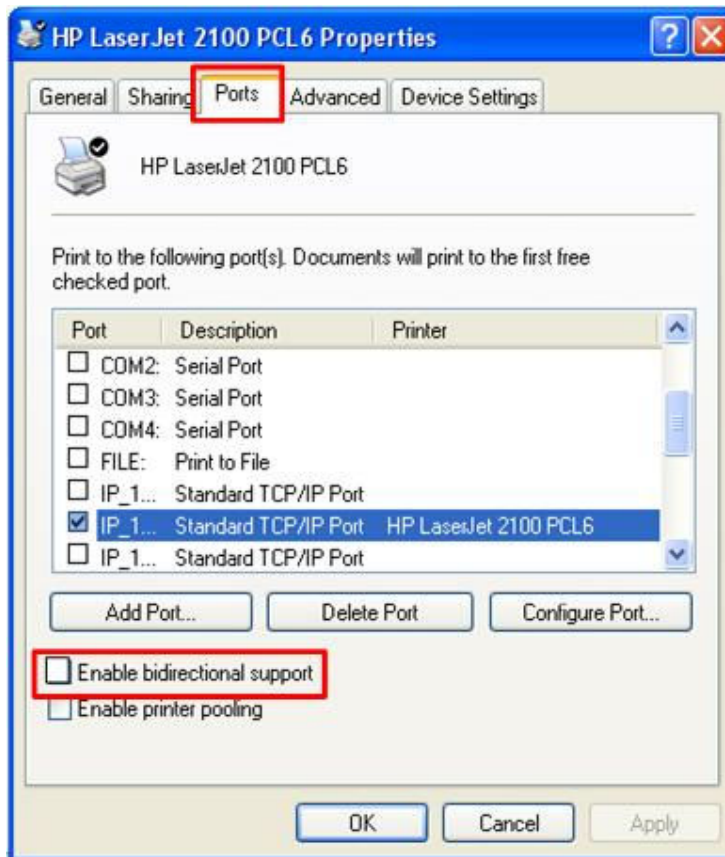


**Step 5. Select “Standard TCP/IP port”**

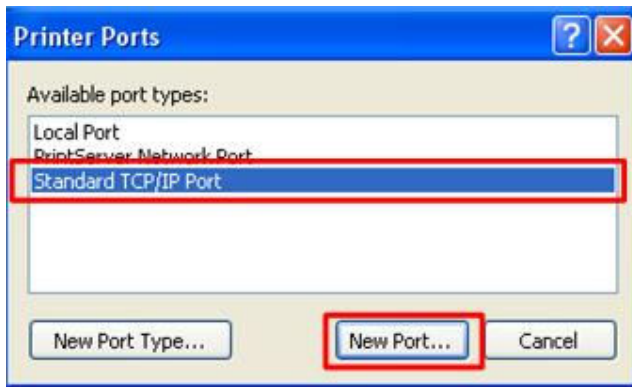


**Step 6. Click "Next" button.**



**Step 7. Enter the IP address of the BR-6215SRg, 192.168.2.1 into the box of the "Printer Name or IP Address".**

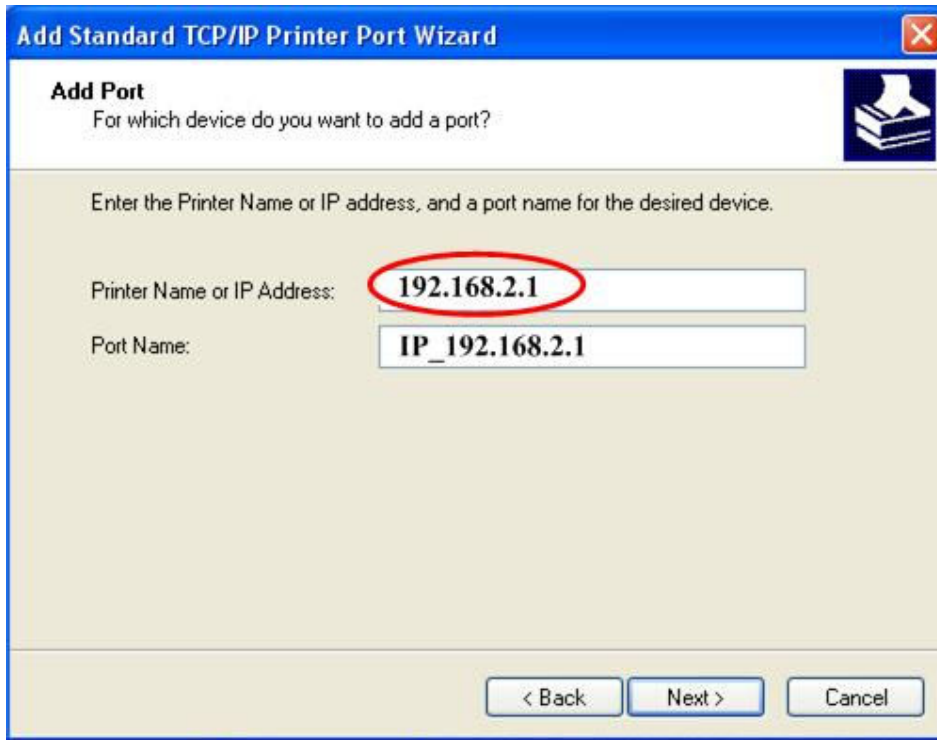

**Step 7. Click “Settings”.**

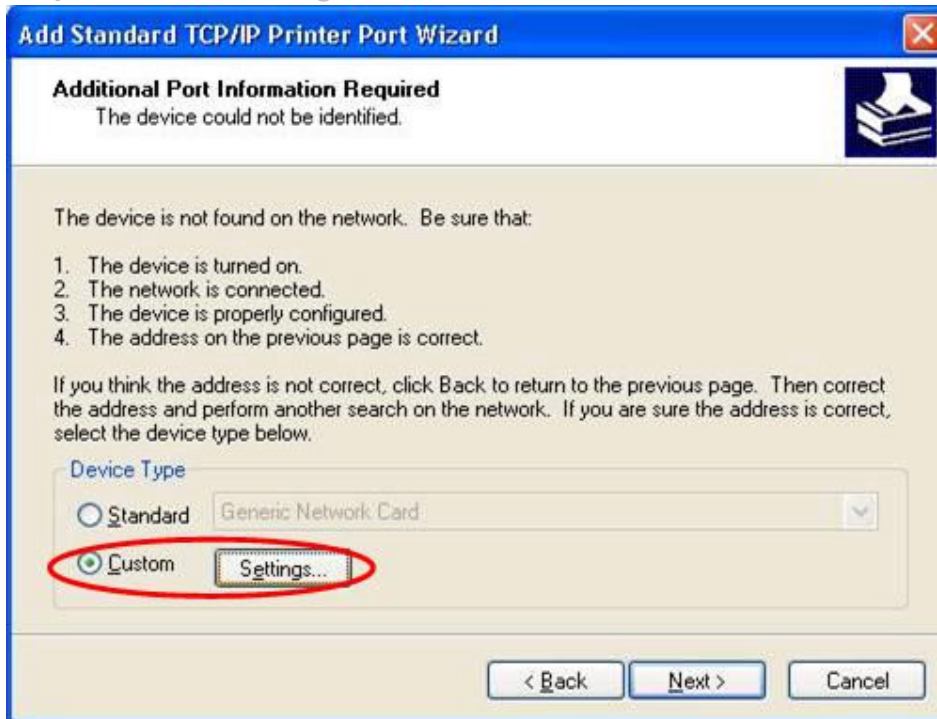

**Step 8. Type “lpt1 “ in “Queue Name” box, and click “OK”.**

**Configure Standard TCP/IP Port Monitor**

Port Settings

Port Name: IP\_192.168.2.1

Printer Name or IP Address: 192.168.2.1

Protocol

Raw  LPR

Raw Settings

Port Number: 9100

LPR Settings

Queue Name: **lpt1**

LPR Byte Counting Enabled

SNMP Status Enabled

Community Name: public

SNMP Device Index: 1

OK Cancel

**Step 9. Click "Next".**

**Add Standard TCP/IP Printer Port Wizard**

**Additional Port Information Required**  
The device could not be identified.

The device is not found on the network. Be sure that:

1. The device is turned on.
2. The network is connected.
3. The device is properly configured.
4. The address on the previous page is correct.

If you think the address is not correct, click Back to return to the previous page. Then correct the address and perform another search on the network. If you are sure the address is correct, select the device type below.


Device Type

Standard Generic Network Card

Custom Settings...

< Back **Next >** Cancel

**Step 10. Click “Finish”.**

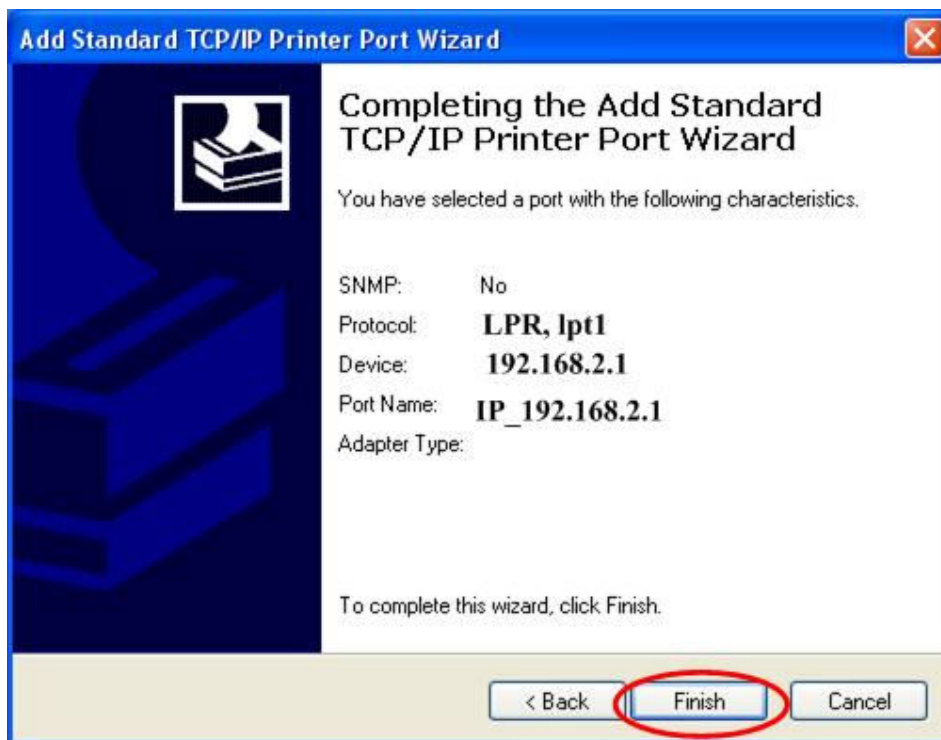

The configuration is complete. Please test whether your PC is able to print with the printer connected to the USB1 of the BR-6104kp.